


HSF BALLCOURT

DOUBLE WIRE PANEL SYSTEM

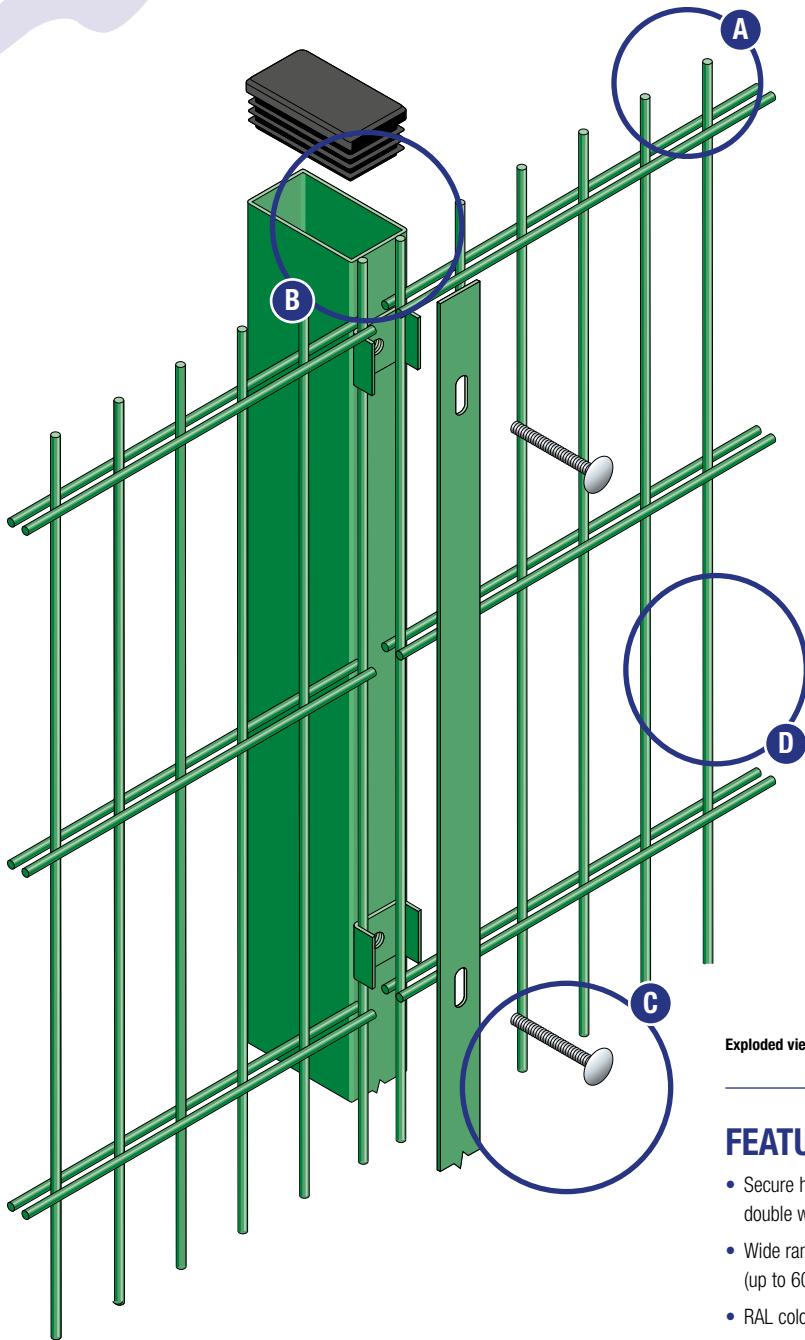

A High performance double wires

B Strong post design

C Smooth and secure bolt

D Mesh aperture ideal for sport

Conforms to BS1722: Part 14



Sheardrive™ option



Exploded view of post and clamp for HSF Ballcourt panel system



FEATURES

- Secure high performance, double wire panels
- Wide range of height options (up to 6060mm high)
- RAL colours available

SUITABLE FOR

- Amenity areas
- Schools
- Professional sports

SYSTEM DETAILS

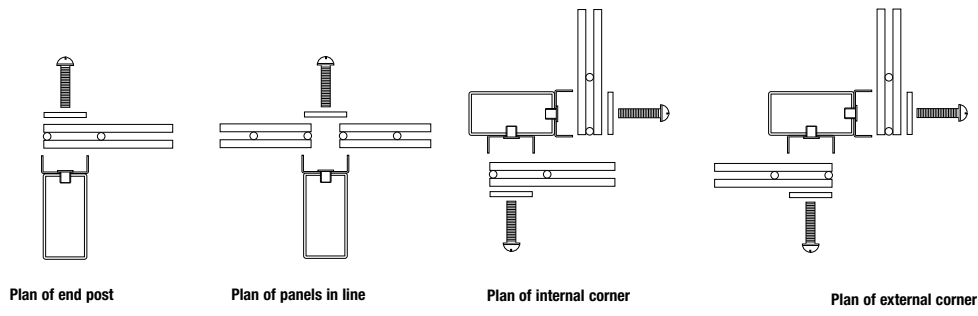



DESCRIPTION

Durability is a key requirement of any sporting perimeter and features as standard across our HSF Ballcourt double wire panel fencing system. Making it the perfect choice when you're looking for strong-yet-practical fencing of up to 6060mm high for your school, football ground or MUGA (multi-purpose game area).

Each steel panel features twin 8mm wires welded either side of 6mm vertical wires, making them extremely difficult to cut through or damage. The twin wires are highly rigid too, adding to the strength of the fence even when under stress from people, balls or sports equipment.

Available in a wide range of RAL colour which can match up with your organisation, club or team colours. All of this comes with the peace of mind that HSF Ballcourt conforms to the British Safety Standards for open mesh steel panel fences.

FINISH

Our welded steel wire mesh fencing panels are galvanised and polyester powder coated. The standard colour is Green RAL 6005. RAL range of colours available.

PANEL DIMENSIONS

Heights[‡]	630, 830, 1030, 1230, 1430, 1630, 1830, 2030, 2230, 2430, 2660, 2860, 3060, 3460, 3660, 3860, 4060, 4460, 4860, 5460, 5660, 6060mm
Panel width	2506mm
Mesh size	200 x 50mm
Wire diameter	6mm (verticals) and 2 x 8mm (horizontal) (also available in 5mm verticals and 2 x 6mm horizontal)
Top edge projection	30mm*

[‡] Fence heights above 2430mm are made up of 2 or more panels.

* Can be inverted to give flush edge.

All dimensions are nominal

HSF BALLCOURT POSTS AND CLAMPS

For the HSF Ballcourt double wire panel system, Wallbank has developed a post and clamp bar system which provides a simple method of securing. Complete with an anti-vandal fastener, installed with either a battery-powered driver or traditional tools, this system offers a rapid and secure installation.

SLOPING GROUND

Panels can be stepped as required within the clamp bar system. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried or additional posts are used.

VARIATIONS

The posts are available in a range of lengths to accommodate panel heights and ground conditions. In addition, many variations are available:

- Wall fixing plates, cranked posts or base plated
- Cranked or straight extensions for barbed or razor wire
- Cranked panels



DIMENSIONS

Posts	60 x 40mm RHS to 120 x 60mm RHS dependant on height
Corner posts	60 x 40mm RHS to 120 x 60mm RHS dependant on height
Post centres	2520mm
Clamping channel	40 x 5mm Steel